


XP line
small size, great power

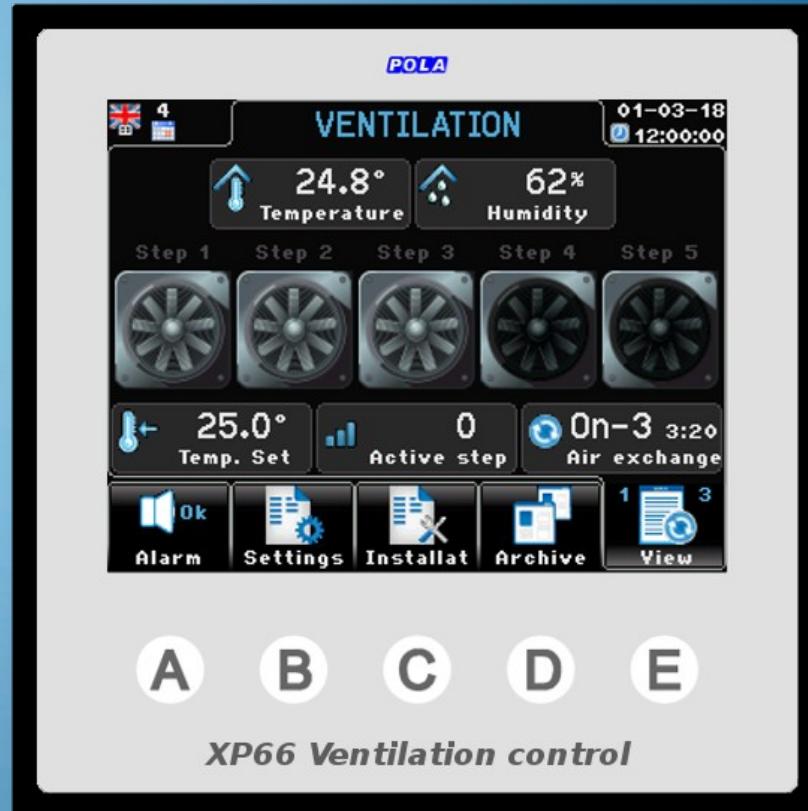

POLA

XP66 ventilation control

Main feature



The main feature of the XP66 is the color display screen (3.5") with 320x240 dots resolution with led backlighting. XP61 is made in DIN 96x96 format and the module dimensions are 96x96mm.




The user interface is easy and friendly. The easy touch screen system gives both the typical "easy to use" approach of a touch screen system and the strength and mechanical protection of a polycarbonate IP54 keyboard.

At every screen the function keys display a different graphic making the program very user friendly.

The user can select the display language: all the wordings, acronyms and "help" texts for programming assistance will be displayed in the chosen language.

Each programming step has its own help screen so the program has a "built in" instruction manual.

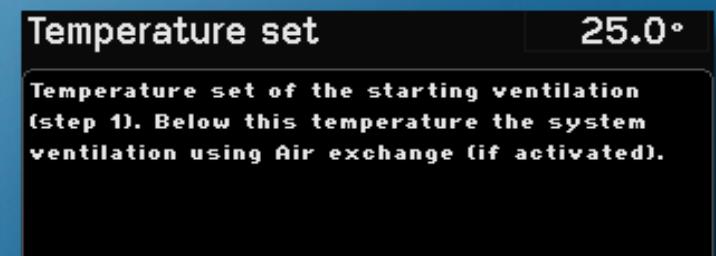

Ventilation control



XP66 controls 5 steps on-off ventilation. Also it features one 0-10V output to control fans by inverter.

The temperature probe controls the parameters of Ventilation, Flaps, Heating system, Cooling system and Alarm. XP66 can also be connected to the %RH probe (to operate the Cooling system) and to the Depressiometer (to operate flaps). Flaps can also be set to work according to indoor temperature (Proportional or Floating Mode) or according to ventilation step (Associative Mode).


The daily archive records the following parameters :

- Min-Average-Max Indoor Temperature
- Min-Average-Max Indoor %RH
- Heating system working time


In the archive are also stored the total working time of the cycle (working hours of Ventilation and Heating Systems)

Ventilation operating diagram

Continuous regulation (ventilation 0-10V)

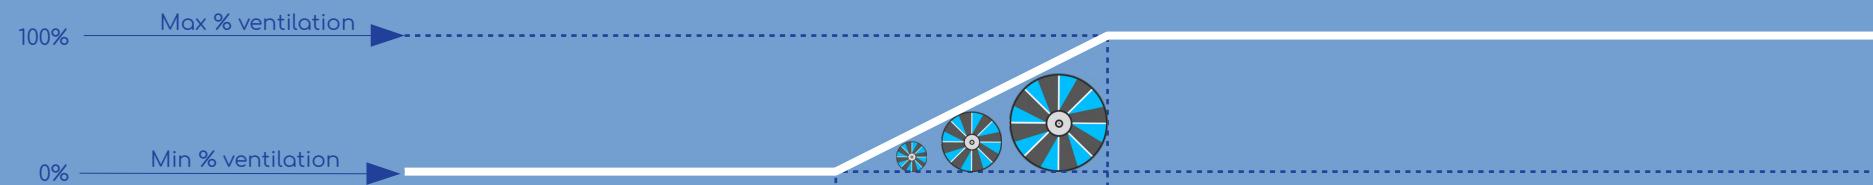


Steps regulation (ventilation Off-On)

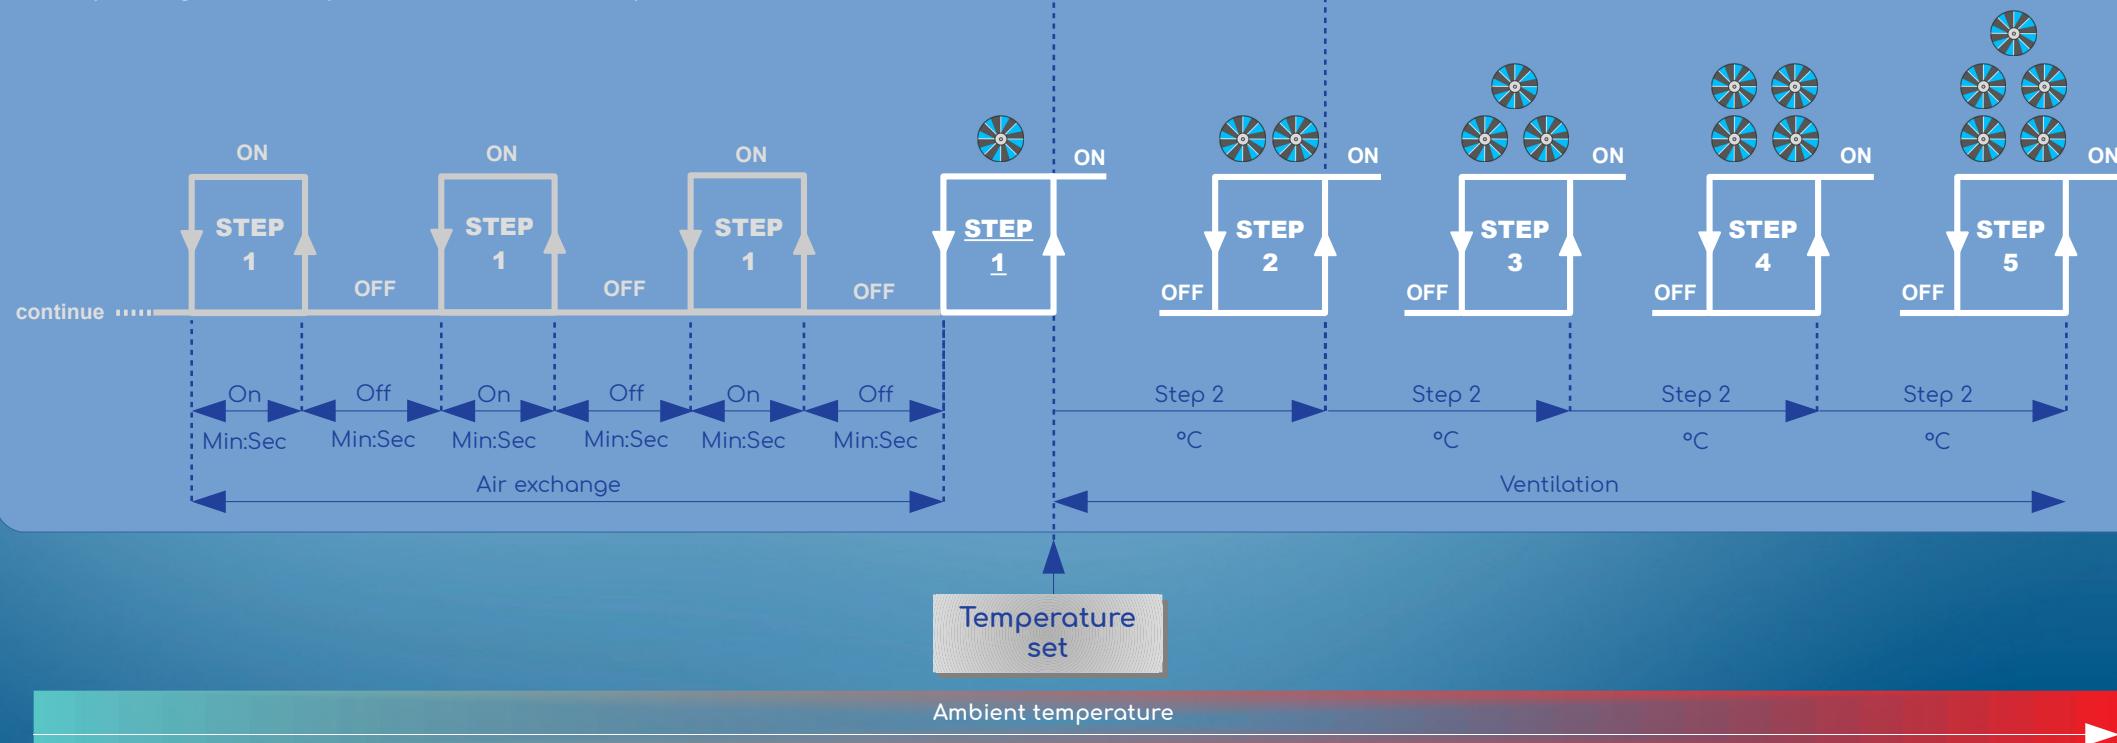


Heating / Cooling / Alarm operating diagram



Heating



Cooling

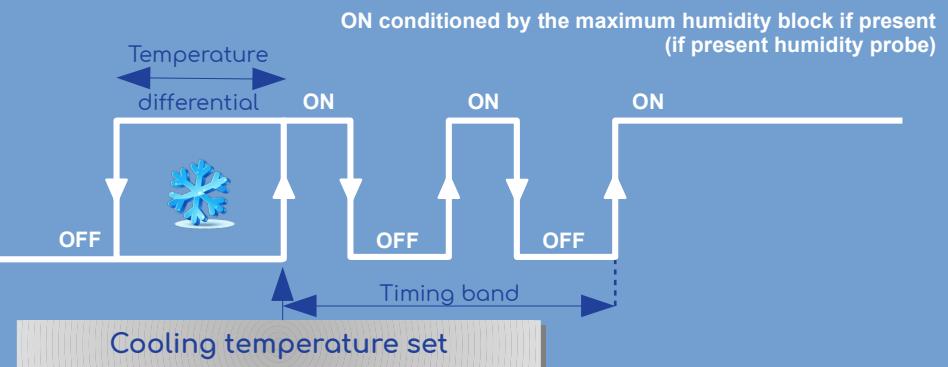


Temperature alarm (same for humidity / pressure)

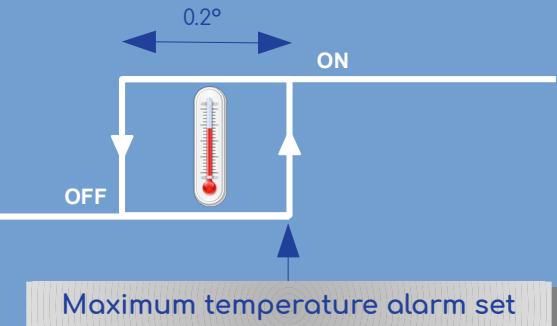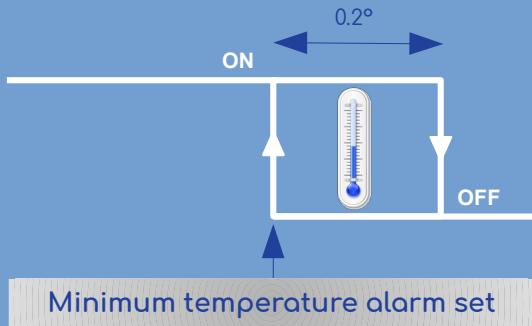

Ambient temperature

Inputs and outputs

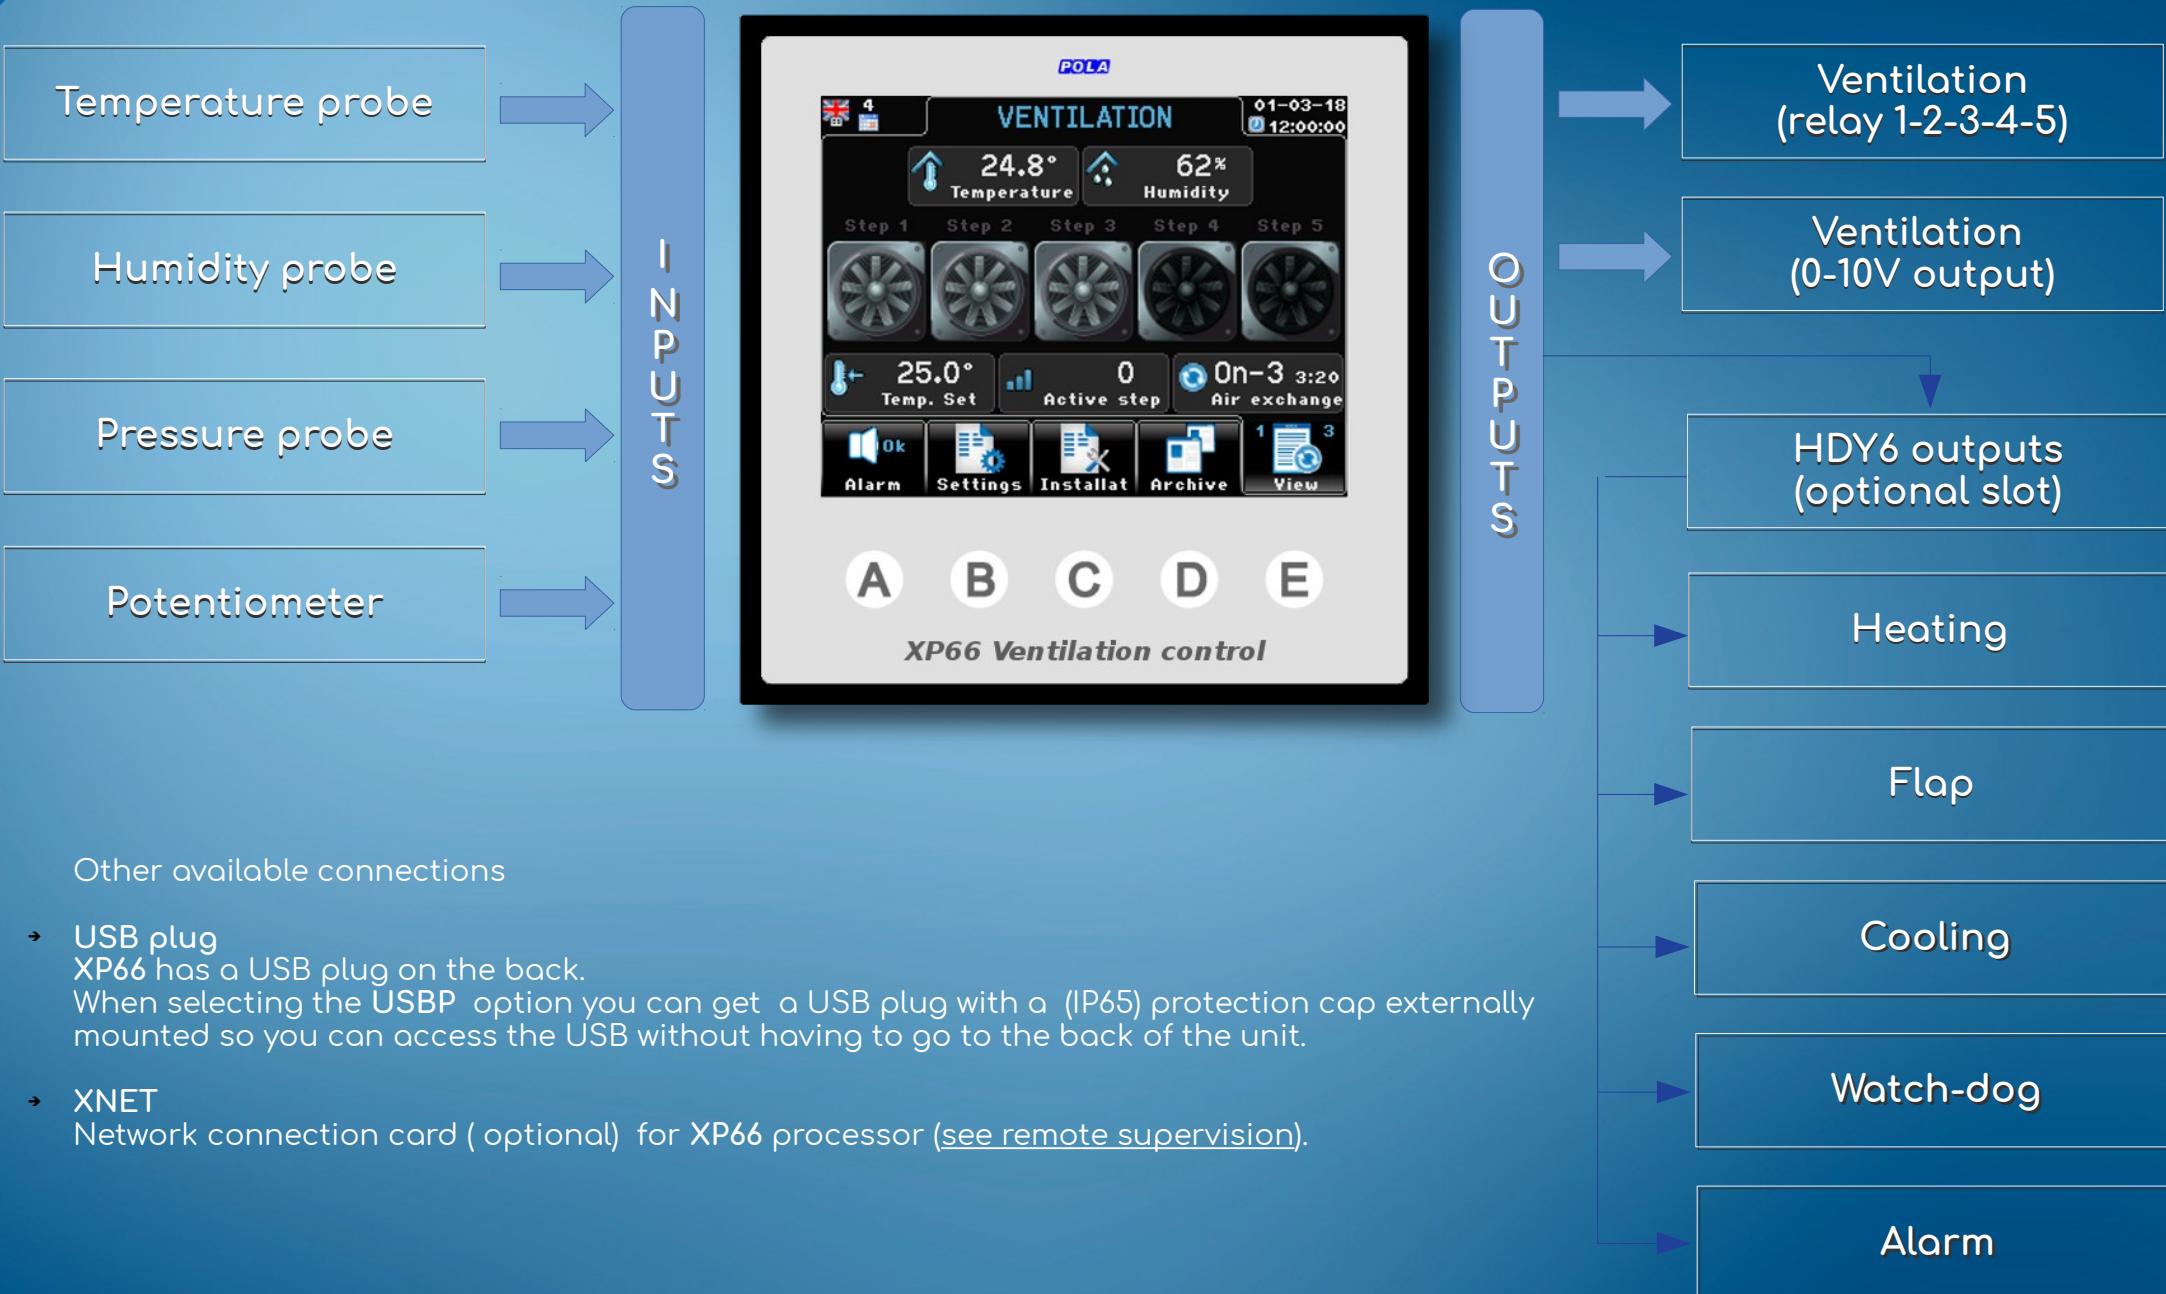





Viewing screens



Viewing operating condition



Viewing operating condition




Viewing operating condition




Output state



Settings screens




Settings selection



Ventilation temperature setting



On time air exchange setting



Heating temperature setting




Archive screen



Archives to display selection



Cycle temperature archive



Cycle temperature chart



Total cycle archive

Data transfer



The communication with the outside world is performed by USB key.

→ **Export archives**

XP66 save in the USB memory a file containing all the day by day recorded data of the cycle.


Connecting the USB key to a PC and by using the XP66 Dialogue software you can browse the recorded data in grid or graph formats.

→ **Importing / saving the setting**

You can save a file with all back-up infos on a USB file.

Saved settings can be uploaded on XP66 anytime by a user friendly procedure.

Remote supervision

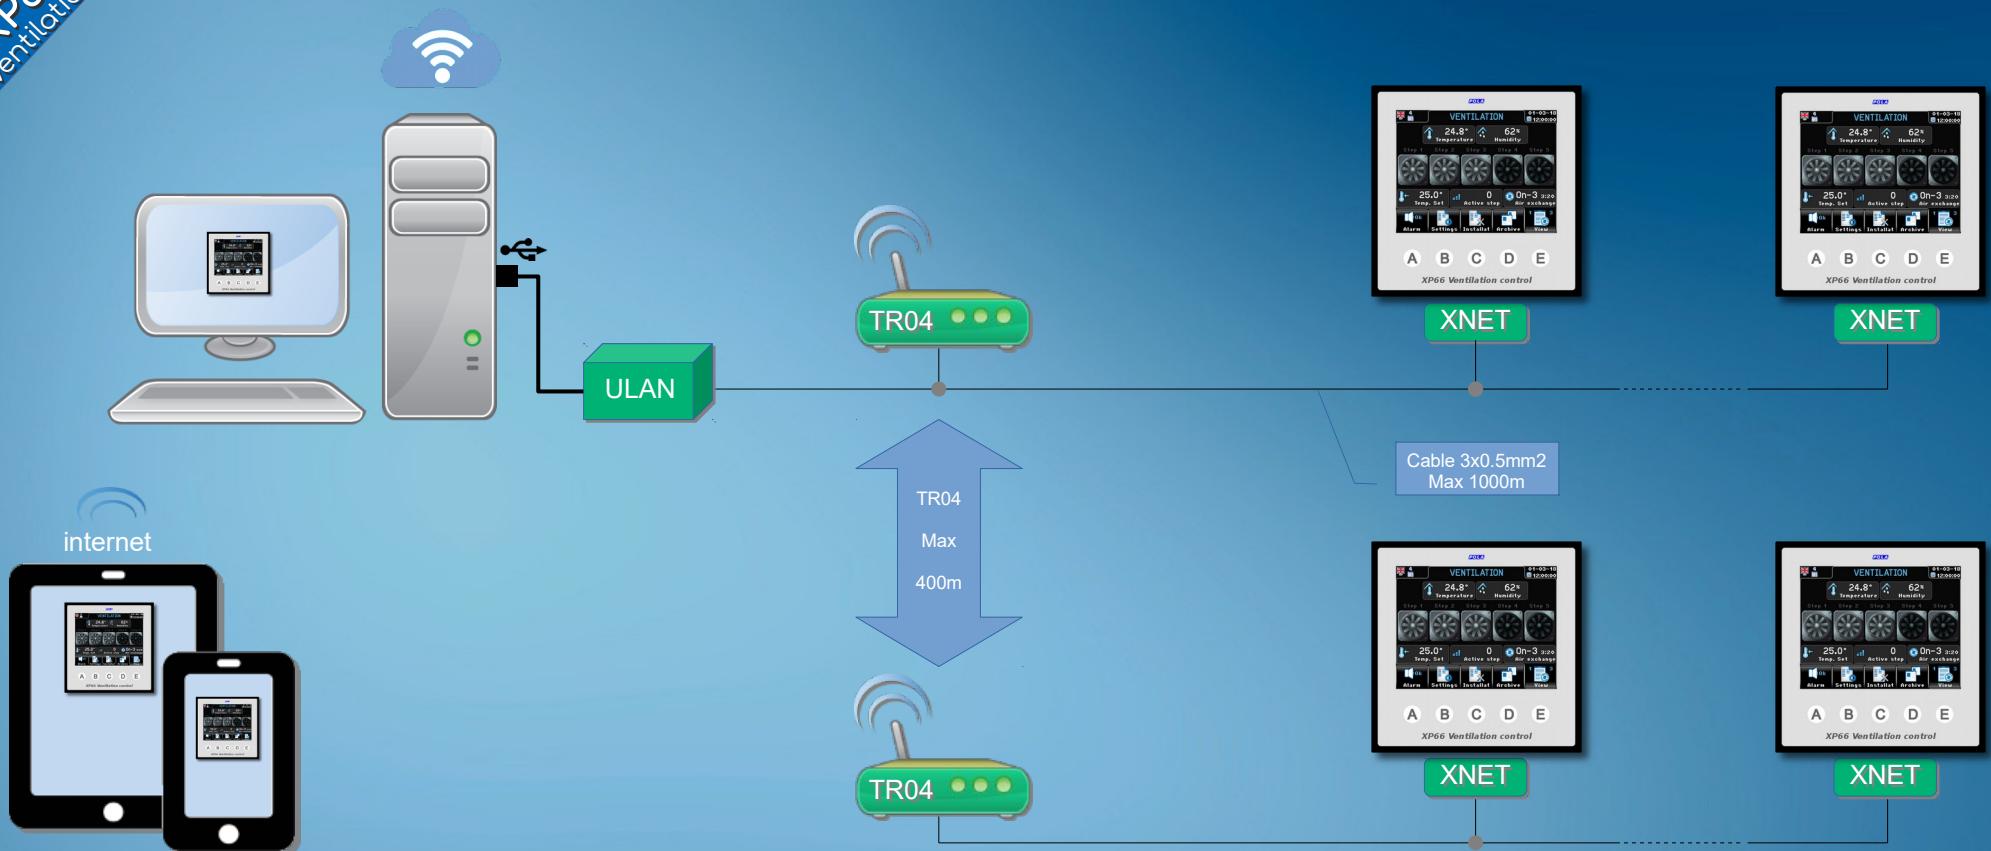

Remote supervision of XP66 processors grants the full management of system by PC.

The XP66 Net Pro supervision software enables the full remote control of network connected processors.
 ULAN peripheral is connected to PC through a USB connection. HP66 – ULAN connection is done by a simple 3 wires cable.
 In all cases where ULAN cannot be cabled to XP66 we can supply TR04 radio-modems with a reach of 400 mt.

Components for creating a supervision system:

- ULAN: Network server Pc (with USB connection)
- XNET: Network adapter card (one for each XP66)
- TR04: Radio-modem 485 (optional, to be used only when it is not possible to use the cable)

Available options

<i>Model</i>	<i>Description</i>
XP66	Ventilation control (DIN96 panel mounting)
<i>Options</i>	
SX	Temperature probe
WT1	Psychrometric kit to control the ambient %RH Includes the SX temperature sensor (so no need to order an extra SX when the WT1 kit is installed)
W01	IP54 box for wall mounting + gasket + transparent cover
USBP	USB IP65 external plug (to be mounted externally, for access to the USB without the need to access the back of the XP66)
HDY6	Relays extension slot
RHR	0...100% humidity probe
HA20s	Power pack for RHR humidity probe
DP59/W	Air pressure transmitter
PT	Flap feedback potentiometer
HMZD1	Ventilation 0-10V manual control module (DIN96 panel mounting)
HP29	Independent alarm temperature/pressure/watch dog
XNET	Network nodal point
ULAN	Network server Pc (with USB connection)
TR04	Radio-modem 485 (IP55 junction box with power supply 230/12v)




Images

Available options




XP66

W01

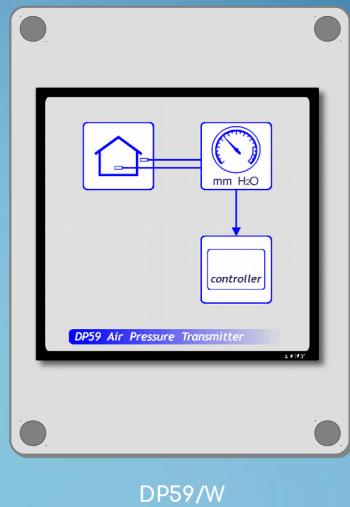

DP59/W

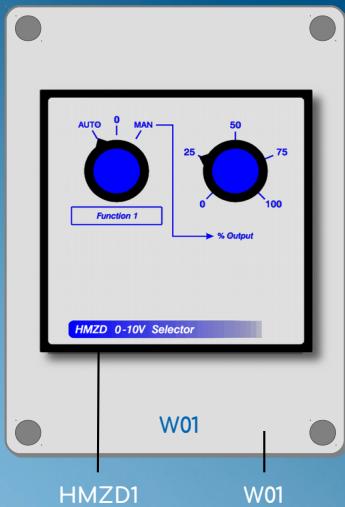

HMZD1

W01



HP29

W01





SX



WT1



RHR




HDY6



HA20s



ULAN



XNET



USBP



TR04



40th
40 YEARS OF INNOVATION